

The VersaPump 6 is a programmable precision liquid metering instrument with non-volatile user program memory and system input/output (I/O). The V6 is designed with the flexibility and versatility to meet a variety of system configurations. It can be used as a stand alone controller, or integrated into system configurations. The module is capable of simple closed loop control of an external quantity or process without the need of an external controller for direction.

Mechanically, the syringe pump is driven via stepper motor and precision ball screw. It has a 60mm stroke and is available in three resolutions. The pump can be coupled with a variety of valves and syringes, as well as PC board selections, to meet specific needs.

Pump communications are compatible with other Kloehn devices.



Physical

Height

10"

Width

2.55"

Depth

4.75" (face plate to back plate)
4.9" to card edge

Weight

5.14 lbs.

Environmental

Operating Temperature

32°F to 131°F (0°C to 55°C)

Operating Humidity

5 to 95% RH, non-condensing at
131°F (55°C)

Storage Temperature

13°F to 185°F (-25° to 85°C)

WEEE & RoHS compliant

Mechanical

Operation

Any orientation

Mounting Holes

Top and bottom as well as on
the face plate

Resolutions Available

(12000; 24000; and
48000 increments)

Speed

(Max. – 10000 steps/sec.;
min. 60 steps / sec.)
(Default – 5000 steps/sec.)

Syringe Size

25ul to 50ml

Valve Type

2 way to 12 way
Available with no valve; solenoid valve;
or rotary valve

PC board choices:

Base board (sensor array and motor
pin out only - no motor drivers or
control electronics).

Driver board (sensor array and
motor drivers only, no control
electronics).

Driver & Control boards (fully
functional motor drivers and control
electronics).

Card-edge connector

Integrated RS232

Integrated power filter

Multiple valve choices

Including no valve & solenoid valve

1/10 Stroke Dispense

Precision: 0.10% CV, 0.20% max.

Accuracy: 0.20% CV, 0.60% max.

Full Stroke Dispenses

0.007% CV, 0.0092% max.

--

Interface

RS-485 or RS-232 communications

Data terminal or OEM protocol

1200 to 38.4K baud, 8 data bits,

1 stop bit, no parity, half duplex

Three inputs, three output ports

Digital voltmeter

Switched and wired device address

Power

Operation

24V (with a maximum power voltage
ripple of 720mv peak-to-peak).

Power Consumption

40 watts, 11 watts idle.

Syringe Pump:

VERSAPUMP 6 AVAILABLE SCENARIO CHART

RESOLUTION			VALVE FEATURE			DRIVER & CONTROL FEATURE		PUMP	
48K	24K	12K	NONE	SOLENOID	ROTARY	BASIC	DRIVER BOARD	DRIVER & CONTROL BOARD	PT#
X			X			X			54000
X			X				X		54001
X			X					X	55002
X				X		X			54010
X				X			X		54011
X				X				X	55012
X					X	X			54020
X					X		X		54021
X					X			X	55022
	X		X			X			54100
	X		X				X		54101
	X		X					X	55102
	X			X		X			54110
	X			X			X		54111
	X			X				X	55112
	X				X	X			54120
	X				X		X		54121
	X				X			X	55122
		X	X			X			54200
		X	X				X		54201
		X	X					X	55202
		X		X		X			54210
		X		X			X		54211
		X		X				X	55212
		X			X	X			54220
		X			X		X		54221
		X			X			X	55222

Decal (23279) is optional, add to order as required. 3-way solenoid valve supplied with pumps configured for solenoid valve.

Precision Syringe Pump V6P:

VERSAPUMP 6 AVAILABLE SCENARIO CHART

RESOLUTION		VALVE FEATURE		DRIVER & CONTROL FEATURE		PUMP
48K	24K	ROTARY		DRIVER & CONTROL BOARD		PT#
X		X		X		55023
	X	X			X	55123

Ancillary items:

Communication cable RS485, 6" long; pump to pump (2 units)	P/N 17736
Cooling Fan Option	P/N 24290
Starter Kit (includes all items listed below)	P/N 23427
24VDC Power supply	P/N 23429
Adapter (card edge to AMP connectors)	P/N 23428
Connector (card edge with solder pins)	P/N 26875
Software; operator's manual; and application notes.	P/N 23422
Communications cable (RS232 / 5' long; pump to computer)	P/N 17734

Software support:

KloehnControl (configuration and debug program)
 KSerial (command-line communication utility)
 KCom (machine language helper program)
 KProbe (communication trouble shooting utility)

Valves:

Configuration	Orifice	Distribution	non-distribution	Port Thread
Through mtg block	0.059	19218	—	¼-28 UNF
2-WAY	0.059	—	—	¼-28 UNF
3-WAY	0.059	17616	17615	¼-28 UNF
4-WAY	0.059	17617	17712	¼-28 UNF
5-WAY	0.059	17618	—	¼-28 UNF
6-WAY	0.059	17619	—	¼-28 UNF
8-WAY	0.059	17620	—	¼-28 UNF
12-way	0.040	24105	—	¼-28 UNF
3-WAY	0.076	18189	18192	¼-28 UNF
4-WAY	0.076	18190	18191	¼-28 UNF
5-WAY	0.076	18188	—	¼-28 UNF
6-WAY	0.076	18193	—	¼-28 UNF
8-WAY	0.076	17877	—	¼-28 UNF

Valve construction:

V6 pump uses the same valves as the 50300 pump
 Valve wetted surfaces have a PCTFE body insert and PTFE (PTFE) plug.
 Port connection is 1/4-28 UNF.
 Some valve ports may not be accessible when used with certain syringes sizes. See Application Notes for further information.

Standard Syringe Assembly (individually boxed):

Size	Orifice	Standard Syringe	ZDV	Port Thread
25ul	0.027	17591	—	¼-28 UNF
50ul	0.024	17592	—	¼-28 UNF
100ul	0.032	17593	—	¼-28 UNF
250ul	0.039	17594	19509	¼-28 UNF
500ul	0.076	17595	19537	¼-28 UNF
1.0ml	0.076	17596	25429	¼-28 UNF
1.25ml	0.076	17597	25431	¼-28 UNF
2.5ml	0.076	17598	19539	¼-28 UNF
5.0ml	0.076	17599	18463	¼-28 UNF
10.0ml	0.076	17600	18469	¼-28 UNF
25.0ml	0.076	17601	23734	¼-28 UNF
50.0ml	0.076	17602	—	¼-28 UNF

Syringe construction:

Syringes have Borosilicate glass. The 25ul, 50ul, and 100ul syringes use a standard plunger tip, while the 250ul through 50ml incorporate a canted spring design.


UHMW Syringes (individually boxed):

Size	Orifice	Standard Syringe	ZDV	Port Thread
25ul	0.027	—	—	¼-28 UNF
50ul	0.024	24681	—	¼-28 UNF
100ul	0.032	24518	—	¼-28 UNF
250ul	0.039	19513	—	¼-28 UNF
500ul	0.076	24694	25427	¼-28 UNF
1.0ml	0.076	24690	25413	¼-28 UNF
1.25ml	0.076	—	25438	¼-28 UNF
2.5ml	0.076	24685	25388	¼-28 UNF
5.0ml	0.076	18857	24691	¼-28 UNF
10.0ml	0.076	19110	24139	¼-28 UNF
25.0ml	0.076	24688	25380	¼-28 UNF
50.0ml	0.076	—	—	¼-28 UNF

Syringe construction:

Syringes have Borosilicate glass. The 25ul, 50ul, and 100ul syringes use a standard plunger tip, while the 250ul through 50ml incorporate a canted spring design.

Wetted materials: Borosilicate glass; PCTFE; UHMW

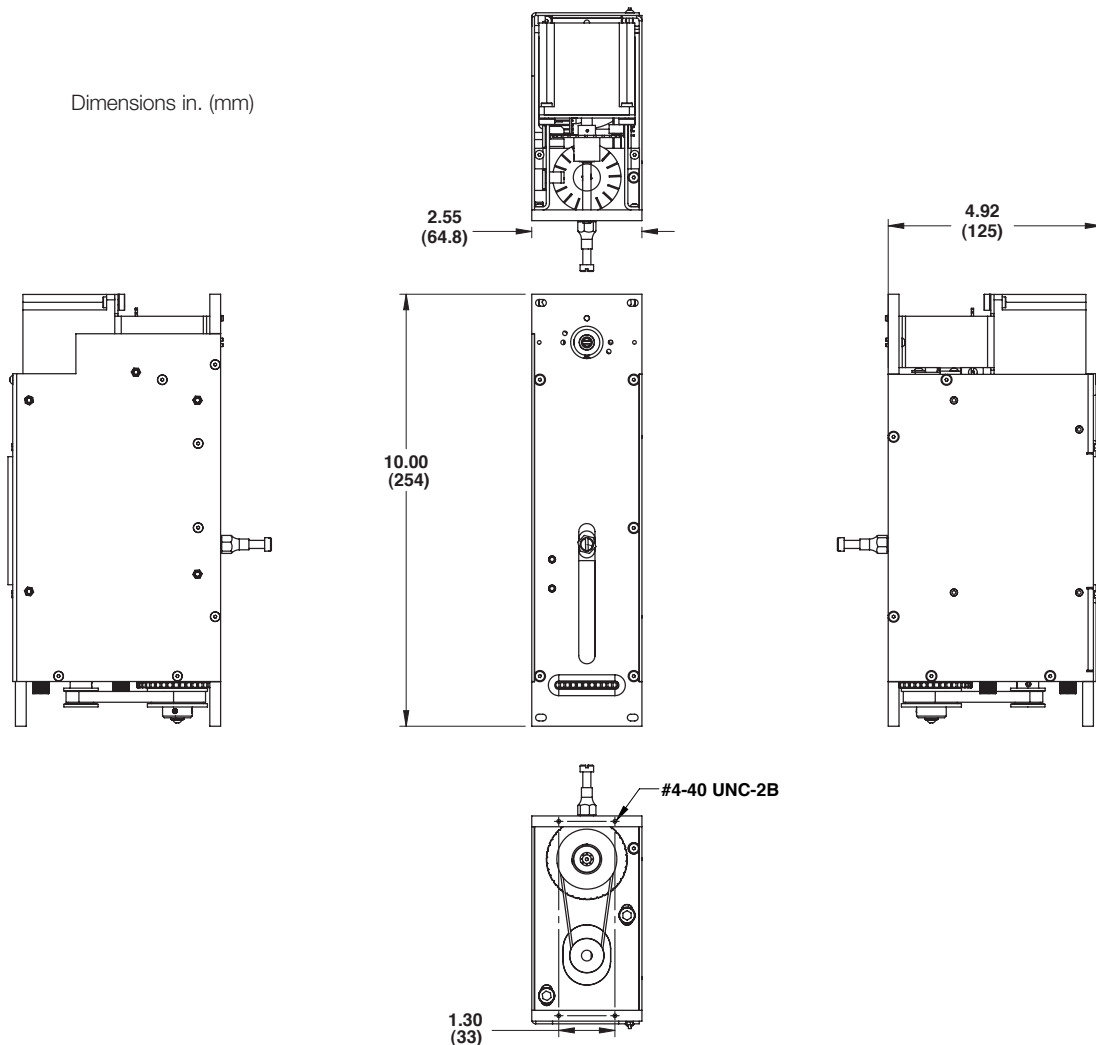



Warning

Improper selection, misuse, age or malfunction of components used in systems can cause failure in various modes. The system designer is warned to consider the failure modes of all component parts and to provide adequate safeguards to prevent personal injury or damage to equipment or property in the event of such failure modes. System designers and end users are cautioned to consult instruction sheets and specifications available from the factory. The system designer/end user is responsible for verifying that all requirements for the application are met.

Proposition 65: These products may contain chemicals known to the state of California to cause cancer, or birth defects, or other reproductive harm.

Warranty

The products described herein are warranted subject to seller's Standard Terms and Condition of Sale, available at seller's website.