

V64H - Olympian Plus plug-in system Pressure relief valves

- Port size: 1/4" ... 3/4" (ISO G/PTF)
- Olympian relief valves protect compressed air systems from over-pressurisation
- High relief capacity, sensitive and accurate
- Threaded relief port for silencer or piped exhaust
- Norgren pressure relief valves comply with category O(S.E.P.) and category 1 of the Pressure Equipment Directive 97/23/EC



Technical features

Medium:
Compressed air only

Operating pressure:
17 bar (246 psi) maximum

Outlet pressure adjustment range:
(standard)
1 ... 10 bar (14 ... 145 psi)
(optional)
0,4 ... 4 bar (5 ... 58 psi),
2 ... 16 bar (29 ... 232 psi)

Port sizes:
1/4", 3/8", 1/2" or 3/4"

Gauge port:
1/8 PTF with PTF main ports
Rc1/8 with ISO G main ports

Relief port:
1/2 PTF with PTF main ports
G1/2 with ISO G main ports

Standard compliances:
 II 2G Ex h IIC T6 Gb
 II 2D Ex h IIIC T85° Db

Ambient/Media temperature:
-20° ... +80°C (-4° ... +176°F)
Version with gauge:
-20° ... +65°C (-4° ... +149°F)
Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F).

Materials:
Body, bonnet & yoke: Zinc alloy
Connection piece: Aluminium
Bottom plug: Aluminium
Adjusting screw: Steel
Elastomers: NBR

Technical data, standard models

Symbol	Port size	Size	Outlet pressure adjustment range (bar)	Weight (kg)	Model
	G1/4	—	1...10	1,68	V64H-2GD-RMN
	G3/8	—	1...10	1,66	V64H-3GD-RMN
	G1/2	Basic	1...10	1,63	V64H-4GD-RMN
	G3/4	—	1...10	1,99	V64H-6GD-RMN
	Without yoke		1...10	1,20	V64H-NND-RMN

Option selector

Port size	Substitute
1/4"	2
3/8"	3
1/2"	4
3/4"	6
Without yoke	N
Thread	Substitute
PTF	A
ISO G (standard)	G
Without yoke (standard)	N


V64H-★ ★ D-R ★ ★

Gauge	Substitute
With	G
Without (standard)	N
Spring (Outlet Pressure Range) *1)	Substitute
1 ... 10 bar (standard)	M
0,3 ... 4 bar	F
2 ... 16 bar	S

*1) Relief valves can be adjusted to pressures in excess of, and less than, those specified. Do not use these units to control pressures outside of the specified ranges.

Relief characteristics

Spring version: 10 bar, port size: 1/2"

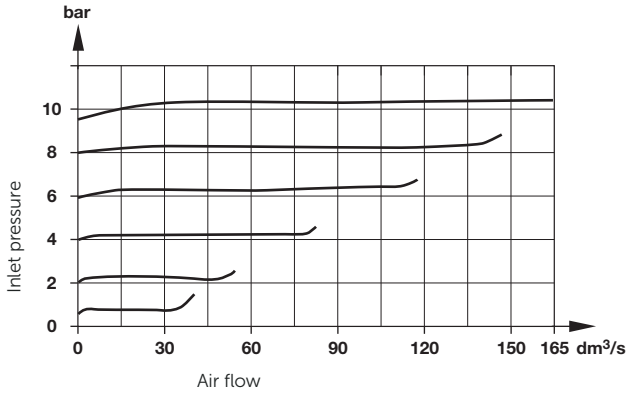

Accessories

	Models with G-thread Single yoke	Double yoke	3/2 Shut-off valve Threaded inlet only	Threaded outlet only	End connector kit	Rear entry bracket kit
Thread						
G1/4	Y64A-2GA-N1N	Y64A-2GA-N2N	T64T-2GB-P1N	T64T-2GC-P1N	—	—
G3/8	Y64A-3GA-N1N	Y64A-3GA-N2N	T64T-3GB-P1N	T64T-3GC-P1N	—	—
G1/2	Y64A-4GA-N1N	Y64A-4GA-N2N	T64T-4GB-P1N	T64T-4GC-P1N	74505-50	—
G3/4	Y64A-6GA-N1N*	Y64A-6GA-N2N*	T64T-6GB-P1N	T64T-6GC-P1N	74505-53	18-026-981
1/4 PTF	Y64A-2AA-N1N	Y64A-2AA-N2N	T64T-2AB-P1N	T64T-2AC-P1N	—	—
3/8 PTF	Y64A-3AA-N1N	Y64A-3AA-N2N	T64T-3AB-P1N	T64T-3AC-P1N	—	—
1/2 PTF	Y64A-4AA-N1N	Y64A-4AA-N2N	T64T-4AB-P1N	T64T-4AC-P1N	74505-52	—
3/4 PTF	Y64A-6AA-N1N*	Y64A-6AA-N2N*	T64T-6AB-P1N	T64T-6AC-P1N	74505-55	—

*These yokes are supplied with two end connector kits as standard.

Bracket mounting	Nut	Tamper resistant kit	Yoke connector kit	Porting block	Padlock with two keys
74504-50	74502-89	1581-90	74503-51	74507-50	0613633 (brass)

Service kit



Gauges

Center back connection, white face (full technical specification see datasheet 8.900.900)



6

Pressure range
bar *1 MPa psi

			Ø	Thread size	Model
0 ... 4	0 ... 0,4	0 ... 58	50 mm	R1/8	18-015-011
0 ... 10	0 ... 1	0 ... 145	50 mm	R1/8	18-015-013
0 ... 25	0 ... 2,5	0 ... 362	50 mm	R1/8	18-015-014

*1) primary scale

Center back connection, black face for North America (full technical specification see datasheet 8.900.900)



6


Pressure range
psig *1 bar MPa

			Ø	Thread size	Model
0 ... 60	0 ... 4	0 ... 0,4	2" (50 mm)	1/8 NPT	18-015-202
0 ... 160	0 ... 11	0 ... 1,1	2" (50 mm)	1/8 NPT	18-015-204
0 ... 400	0 ... 28	0 ... 2,8	2" (50 mm)	1/8 NPT	18-015-206

*1) primary scale

Basic dimensions


Dimensions in mm
Projection/First angle

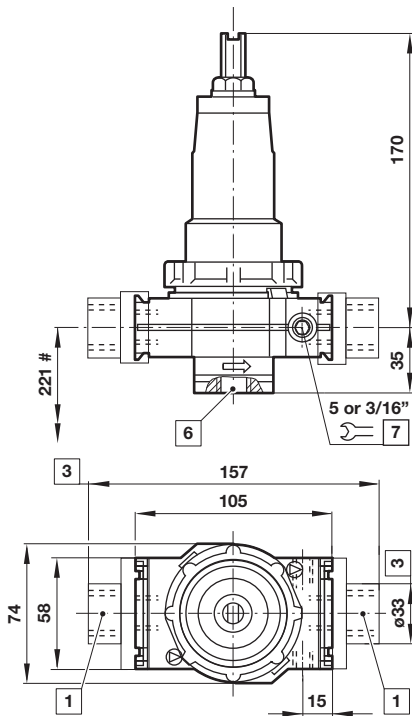


Minimum clearance required to remove unit from yoke

- 1 Main ports 1/4", 3/8", 1/2" or 3/4"
- 3 For main ports 3/4" only
- 6 Relief port 1/2"
- 7 Gauge port 1/8"


Single yoke with bracket mounting

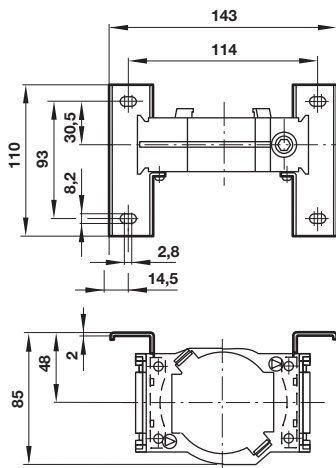

Double yoke with bracket mounting

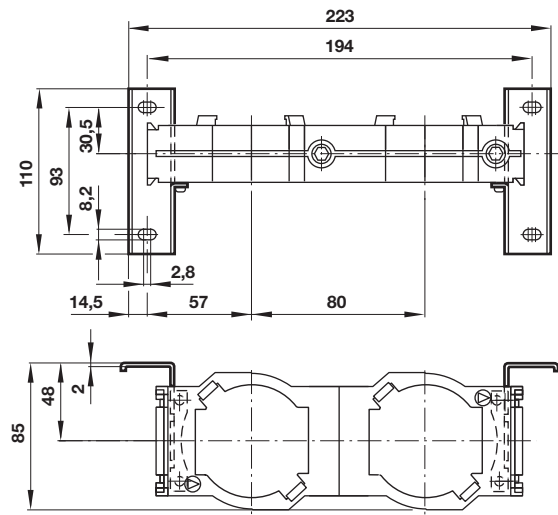


Rear entry bracket 18-026-981

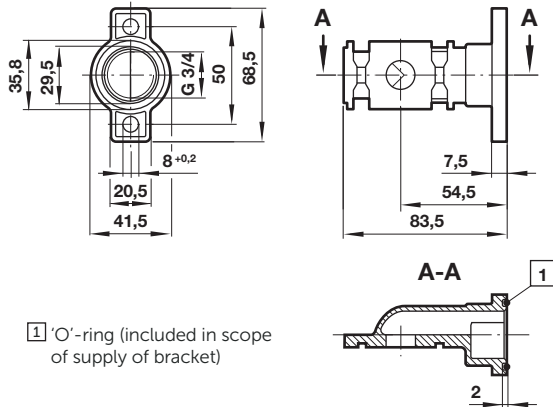

1 'O'-ring (included in scope of supply of bracket)

Porting block 74507-50


Dimensions in mm
Projection/First angle

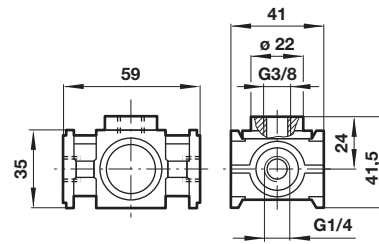

3/2 Shut-off valve

Symbol	A	B	ø C	Model
	G1/4	48	27	T64T-2G*-P1N
	G3/8	48	27	T64T-3G*-P1N
	G1/2	48	27	T64T-4G*-P1N
	G3/4	51	33	T64T-6G*-P1N

* B = Threaded inlet only, C = Threaded outlet only

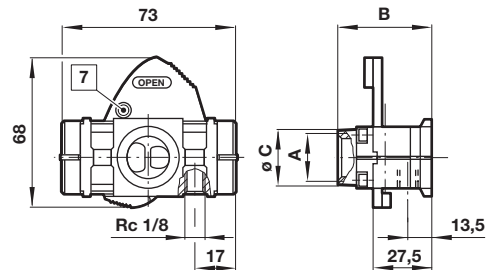

7 Padlock hole 7,5 mm

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/ data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren Ltd.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.